



Compressor hermetic scroll Panasonic C-SBN263H8A Panasonic

Data sheet

Voltage	380-415V/3/50Hz
Horse power	3 1/2 CV
Displacement cm ³	55.7 cm ³
Cooling capacity at ARI conditions, R407C	9.6 kW
Cooling capacity at Refrigeration conditions, R404A	7.22 kW
Cooling capacity at Ashrae conditions, R134a	6.5 kW

Cooling capacity at ARI conditions, R134a	6.5 kW
Refrigerant	R407C, R404A, R134a, R407F
Suction pipe	7/8 inch
Discharge pipe	1/2 inch
Weight	36.50 Kg
Current	7.30 A
Start-up intensity (rotor blocked)	48 A
Maximum service intensity	10.20 A
Type of oil	FV68S
Recharge oil	1600 cc
Text	380/415-3-50 (460/440-3-60) Disponibile en versión tandem
Sound level	62 dB
Temperature	Medium/high
Ambient temperature	35 °C
Technologies	Fixed speed
Heat pump	No
Maximum shell bottom temperature	90 °C
Maximum discharge temperature	115 °C
Maximum winding temperature	115 °C
Type of motor cooling	Natural
Type of refrigerant	R407C, R404A, R134a
Motor type	3-PH Induction Motor
Motor protection type	Interno
Speed	2900 rpm
Low pressure design	1.60 M Pa
High pressure design	3.3 M Pa


✓ [View more information](#)

Documentation

C-SBN263H8A_dibujo.gif 20.57KB (/files/C-SBN263H8A_dibujo.gif)

DIMENSIONAL SKETCH

C-SB Series (3.5HP)

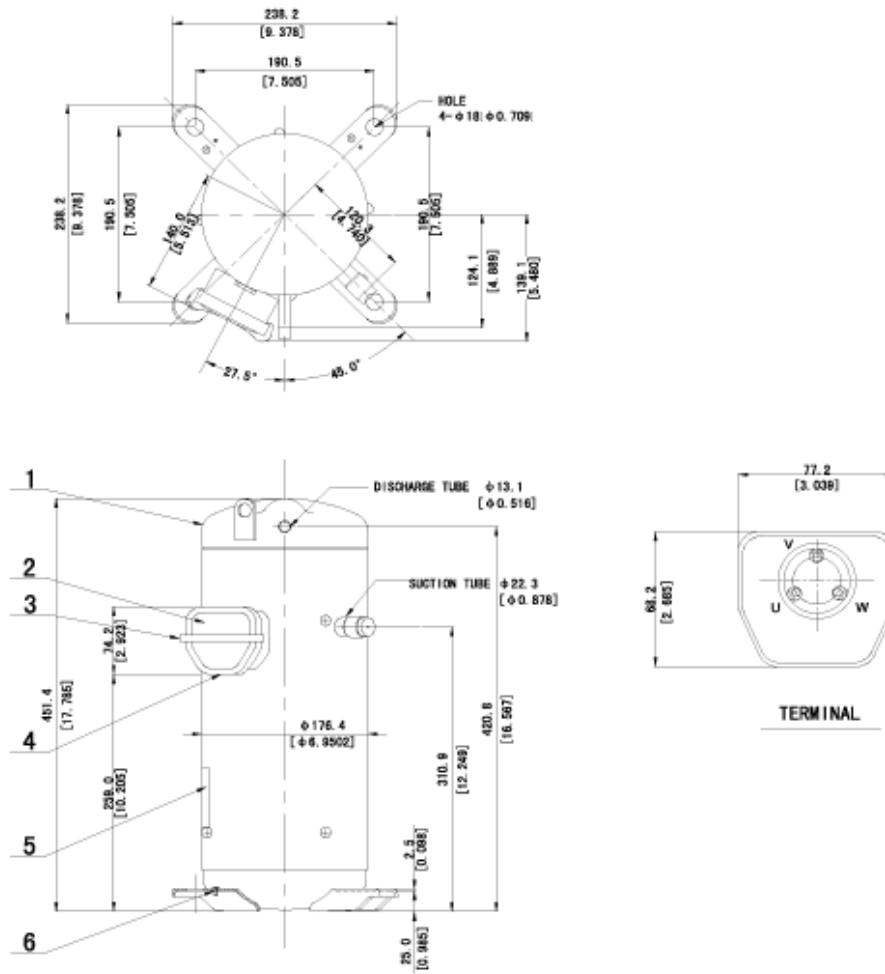

No.	Qty	Name
1	1	Compressor
2	1	Terminal Box Cover
3	1	Terminal Box Clip
4	1	Insulating Grommet
5	1	Nameplate
6	1	Screw Special

wiringdiagramc-sb-3ph_290813_1377788332_3_.jpg 142.15KB (/files/wiringdiagramc-sb-3ph_290813_1377788332_3_.jpg)

