


## V SERIES Remplacent thermostats

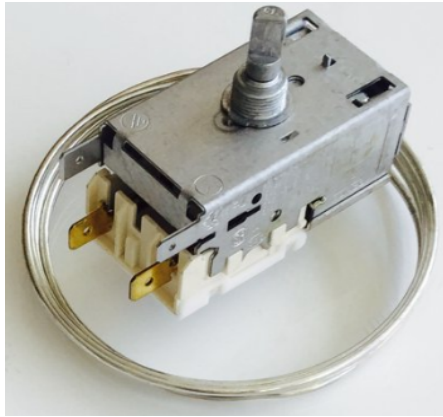

Series replacement thermostats for applications in commercial refrigeration and air conditioning industry.

Differential fixed

Straight capillary

Variable scale depending on the model regulation.

Powers of contacts 6 (6) to 16 (16) A

Faston connections

Model	Application	Temperature range °C						End defrost	Signal	Contact	Capillary length mm
		Cool		Heat							
		Open	Close	Open	Close						
VC1	1 door refrigerator	-23	-14	-7	+2			6(6)A a 250V	1200		
VA2	1 door refrigerator Apsortion refrigerator	-18	-14	-0,5	+3,5			6(6)A a 250V	2000		
VP4	1 door refrigerator Manual defrost button	-25	-19	-11	-4	+5,5		6(6)A a 250V	1200		
VS5	Freezer	-34	-26	-20	-12		5 °C T close	3-4 6(6) 3-6 0,1A a 250V	2000		
VT9	2 door refrigerator Automatic defrost (1compressor)	-26	+3,5	-11	+3,5	+3,5		3-4 6(6) 3-6 0,1A a 250V	1200		
VG7	Beverage cooler	+1,5	+4	+8	+11			6(6)A a 250V	2000		