



GENERAL DATA

Application:	M/HBP
Refrigerant:	R134a
Expansion Device:	C
Weight:	12.6 kg
Receiver:	0 liter
Voltage:	at 50 Hz 220 - 240 V
Height:	226 mm
Length:	431 mm
Width:	290 mm
Institute Approvals:	CE


EXTERNAL DIMENSIONS

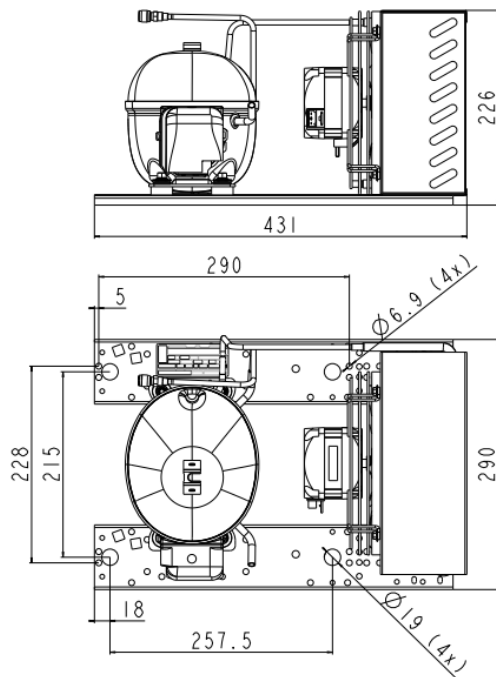

WIRING DIAGRAM

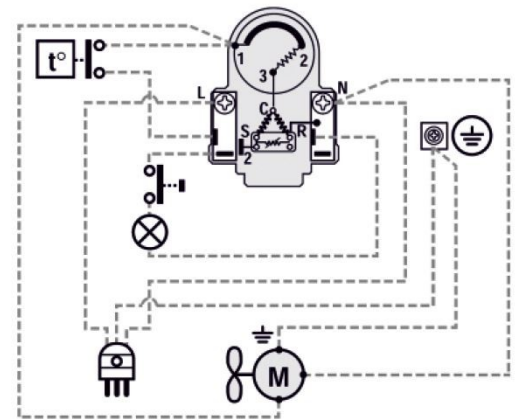

OPERATING ENVELOPE

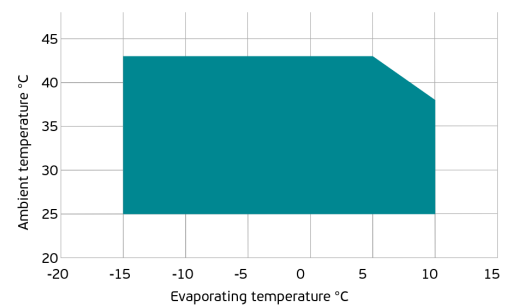

COMPONENTS (SPARE PARTS)

Fan Kit: 10W 200/28°/5B 1996700

Condenser: 2R8T 2451207

For additional accessories please contact our technical support

NOISE DATA

Sound power level: 0 dB (A)

Sound pressure level dB (A):

0 (at 1m) | 0 (at 5m) | 0 (at 10m)

Maximum noise at maximum ambient temperature, 20°C return gas, configurations voltage and frequency.

ELECTRICAL DATA

Motor Type: RSIR

Locked Rotor Amperage (RLA): 5.4 A

Max.Current: 1.3 A

At maximum evaporating temperature and maximum ambient temperature.

FAN MOTOR

Number: 1

Shaft Power: 10 W

Air Flow: 300 m³/hod

Blade Diameter: 200 mm

PERFORMANCE DATA

Standard: EN13215 / return gas 20°C, subcooling 3K

50 Hz

	Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W/W)
25°C Ambient Temperature	10°C	550	212.43	1.30	2.59
	5°C	476	194.78	1.21	2.44
	0°C	405	178.48	1.15	2.27
	-5°C	338	163.64	1.10	2.07
	Rated point -10°C	275	150.35	1.06	1.83
	-15°C	218	138.71	1.01	1.57
32°C Ambient Temperature	10°C	500	219.00	1.34	2.28
	5°C	433	200.80	1.26	2.16
	0°C	368	184.00	1.19	2.00
	-5°C	307	168.70	1.14	1.82
	Rated point -10°C	250	155.00	1.09	1.61
	-15°C	198	143.00	1.04	1.38
43°C Ambient Temperature	5°C	367	212.00	1.32	1.73
	0°C	313	195.04	1.26	1.60
	-5°C	261	178.96	1.21	1.46
	Rated point -10°C	213	164.30	1.16	1.30
	-15°C	168	151.58	1.10	1.11